HDD-ROM ***TOOL FREE SCREW-LESS TRAY-LESS***

An incredible 3-in-1 small multimedia storage solution

CE FC

Elegant aluminum design
Fits in any 5.25" drive bay
Two USB 2.0 ports
Unique screwless design for hot-swapping 2.5" SATA hard drive
Accommodates 12.7mm slim optical drive

MRA358 Manual

MRA358

Features:

- Elegant aluminum design
- Fits in any 5.25" drive bay
- Two USB 2.0 ports
- Unique screwless design for hot-swapping 2.5" SATA hard drive
- Accommodates 12.7mm slim optical drive

Specifications:

- Fit all 2.5" Serial ATA hard disk
- Supports hot swap
- Supports SATA II (3.0Gb/s)
- Housing Assembly: 148mm(W)x136.4mm(D)x42mm(H)
- Interface: SATA or PATA for slim optical drive SATA for hard drive
- Weight: 626g
- Operating Temperature: 0~55℃

Package Content:

MRA358	1Pcs
SATA data cable	1Pcs
Fan power & access SATA cable	1Pcs
User manual	1Pcs
Screws 3x6pwn	4Pcs
Screws 2x3pm	2Pcs

Installation :

1

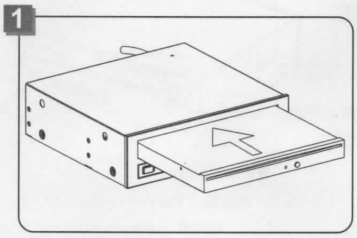

Push 12.7mm slim optical drive into the slim drive bay.

2

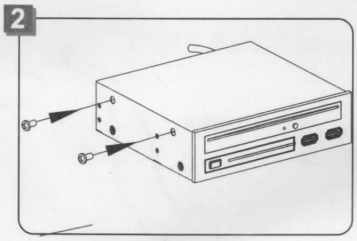

After pushing the slim optical drive into position to align with the front panel, use a magnetic screwdriver to secure two screws to the optical drive.

3

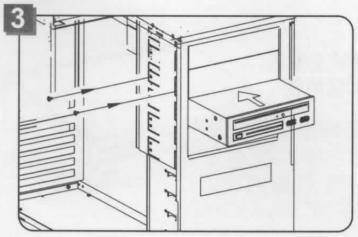

Place MRA358 into an available 5.25" bay in the chassis and secure with screws.

Connection :

1. Insert the SATA 15P CONN. Into the MRA358 ' s 15P conn. connect the big power 4P connector to the PC' s 4P power plug, and the small 4P LED wire connector to the 4P LED port at the back of MRA358.

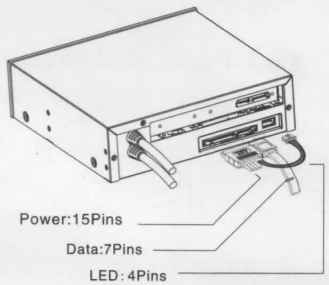

2. Insert one end of the SATA 7P cable to MRAMRA358, another end(7P) to either the mother board or the SATA RAID card.

3. Plug your optical drive's signal cable (SATA or PATA) and power cable to your motherboard and power supply.

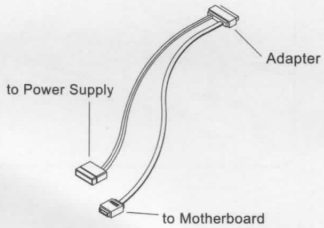

4. Plug USB 2.0 cable connector to your motherboard. If your motherboard does not support USB 2.0 then you can use the alternate USB 2.0 connector instead for USB 2.0 operation only.

Inserting the Hard Drive:

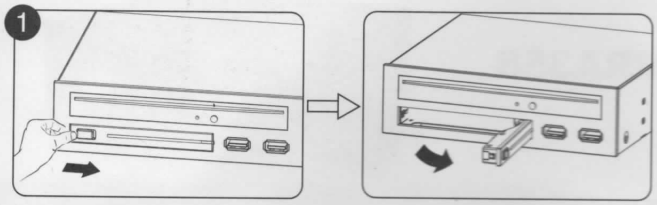

1. Pull the two keys of HDD-ROM gently from left to right to eject the panel.

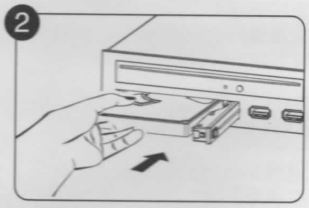

2. Put the 2.5" HDD into the MRA358

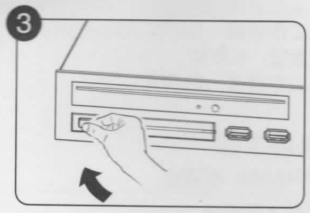

3. close the front panel.

⚠
1. After inserting HDD and closing the front door, carefully push the tray until it is seated into position. Excessive force may damage its mechanical parts.
2. If the HDD is inserted backward into the tray, forcing the device may damage the MRA358 HDD-ROM.

Removing the Hard Drive:

1. Press the two bottons of HDD-ROM gently to eject the panel.
2. Open the front panel to take out the 2.5" hard drive, and close the upper panel firmly.

⚠
1. Do not eject the HDD while it is busy
2. Carefully take the HDD out from MRA358 HDD-ROM. The HDD can reach temperatures over 50°C. It will not burn the fingers but should be handled with care.

Statement

The contents of user's manual are protected under copyright law. Any organization or individual can not make copy and save it in the information bank or the retrieval system by any method or form without the authorization of Wingsonic. Wingsonic is not responsible for any loss in the process of using the HDD-ROM.